


NPN+PNP Digital Transistors (Built-in Resistors)

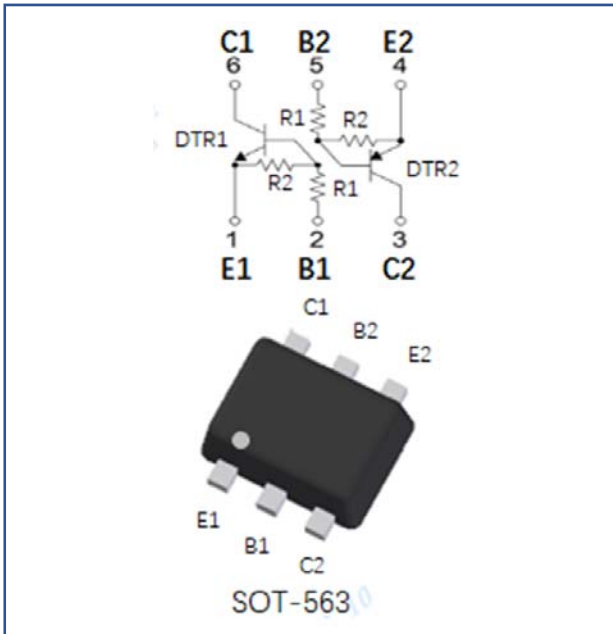

Features

- Moisture sensitivity level 1
- Halogen free and RoHS compliant
- Surface mount package ideally suited for automatic Insertion

Application

- Signal amplification
- Switching circuit

Mechanical data

- **Package:** SOT-563
- **Terminals:** Tin plated leads, solderable per J-STD-002 and JESD22-B102

■ Maximum Ratings (T_a=25°C Unless otherwise specified)

DTR1-NPN

Item	Symbol	Unit	Conditions	Value
Device marking code				D2
Supply voltage	V _{CC}	V		50
Input voltage	V _{IN}	V		-10 to +40
Output current	I _o	mA		100
Power dissipation	P _D	mW		150
Junction temperature	T _J	°C		-55 to +150
Storage temperature	T _{STG}	°C		-55 to +150



DTR2-PNP

Item	Symbol	Unit	Conditions	Value
Supply voltage	V_{CC}	V		-50
Input voltage	V_{IN}	V		-40 to +10
Output current	I_O	mA		-100
Power dissipation	P_D	mW		150
Junction temperature	T_J	°C		-55 to +150
Storage temperature	T_{STG}	°C		-55 to +150

■ Electrical Characteristics (T_a=25°C Unless otherwise specified)

DTR1-NPN

Item	Symbol	Unit	Conditions	Min	Typ	Max
Input voltage	$V_{I(off)}$	V	$V_{CC}=5V, I_c=100\mu A$	0.5		
	$V_{I(on)}$	V	$V_O=0.2V, I_c=5mA$			3
Output voltage	$V_{O(on)}$	V	$I_O / I_i = 10mA / 0.5 mA$			0.3
Input current	I_i	mA	$V_i=5V$			0.36
Output current	$I_{O(off)}$	uA	$V_{CC}=50V, V_i=0$			0.5
DC current gain	G_1		$V_O=5V, I_O = 5mA$	56		
Input resistance	R_1	kΩ		15.4	22	28.6
Resistance ratio	R_2/R_1			0.8	1	1.2
Transition frequency	f_T	MHz	$V_{CE}=10V, I_E=5mA, f=100MHz$		250	



DTR2-PNP

Item	Symbol	Unit	Conditions	Min	Typ	Max
Input voltage	$V_{I(off)}$	V	$V_{CC}=-5V, I_c=-100\mu A$	-0.5		
	$V_{I(on)}$	V	$V_O=-0.2V, I_c=-5mA$			-3
Output voltage	$V_{O(on)}$	V	$I_o / I_i = -10mA / -0.5 mA$			-0.3
Input current	I_i	mA	$V_i=-5V$			-0.36
Output current	$I_{O(off)}$	μA	$V_{CC}=-50V, V_i=0$			-0.5
DC current gain	G_1		$V_O=-5V, I_o = -5mA$	56		
Input resistance	R_1	k Ω		15.4	22	28.6
Resistance ratio	R_2/R_1			0.8	1	1.2
Transition frequency	f_T	MHz	$V_{CE}=-10V, I_E=-5mA, f=100MHz$		250	

■ Thermal Characteristics

Parameter	Symbol	Unit	Value
Thermal resistance, junction-to-ambient	$R_{\theta J-A}^{(1)}$	$^{\circ}C/W$	833
Thermal resistance, junction-to-case	$R_{\theta J-C}^{(1)}$	$^{\circ}C/W$	667

Note:

(1) Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 25.4mm*25.4mm copper pad areas



■ Characteristics

DTR1-NPN

Fig 1: Input Voltage (On) Characteristics

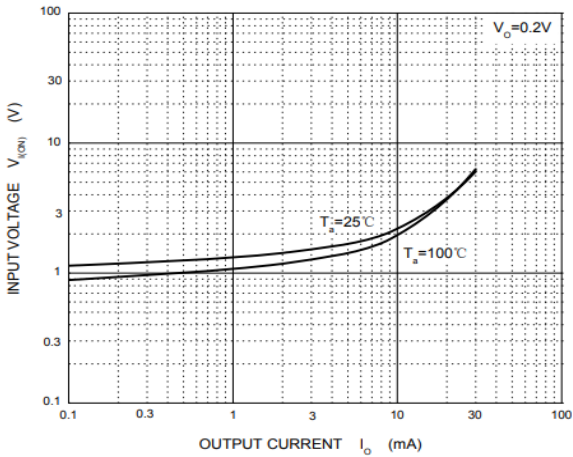


Fig 2: Input Voltage (Off) Characteristics

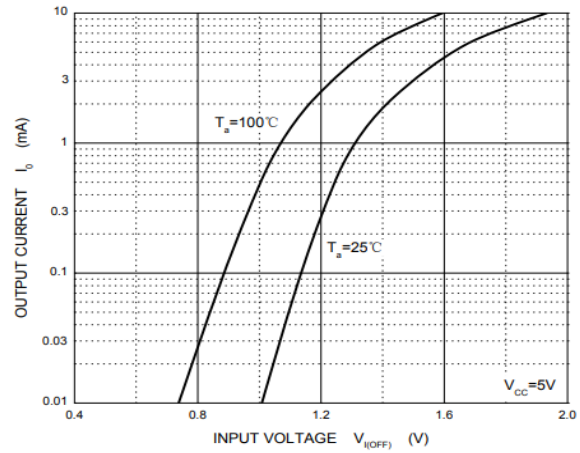


Fig 3: Output Voltage (On) Characteristics

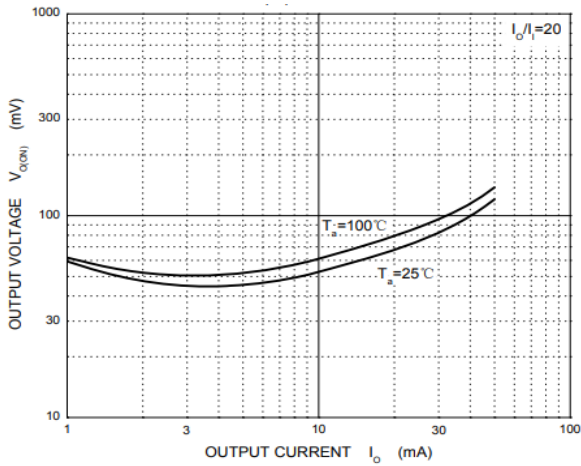


Fig 4: DC Current Gain Characteristics


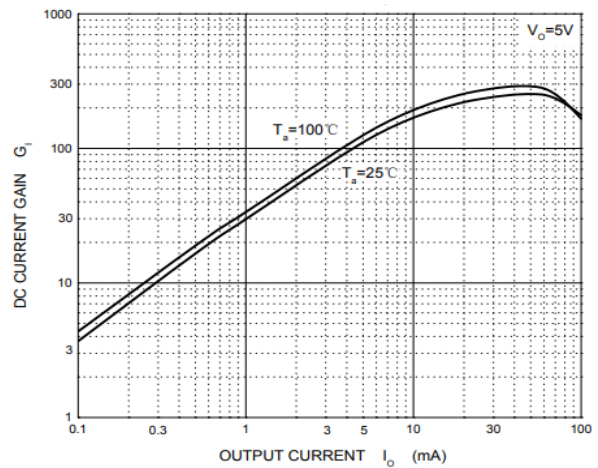


Fig 5: P_D-T_a Curve



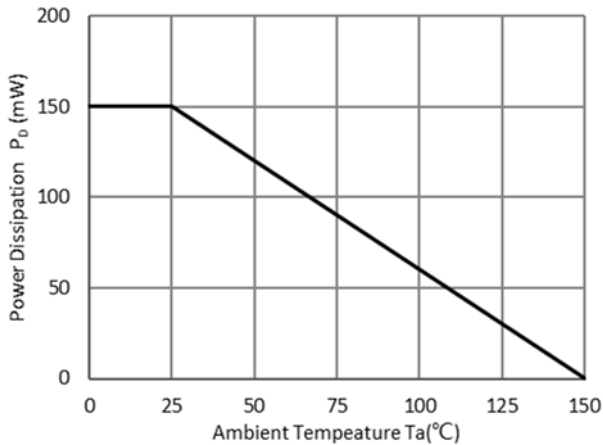

DTR2-PNP

Fig 1: Input Voltage (On) Characteristics

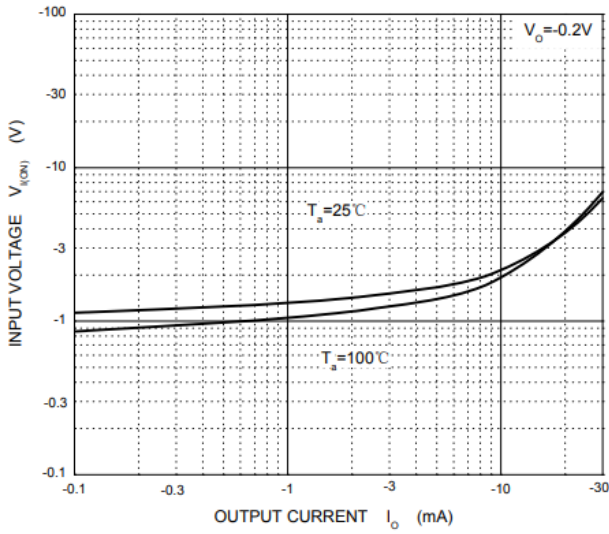


Fig 2: Input Voltage (Off) Characteristics

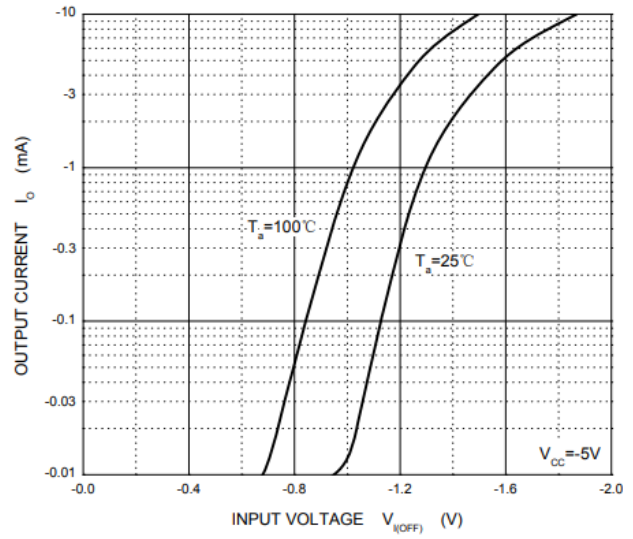


Fig 3: Output Voltage (On) Characteristics

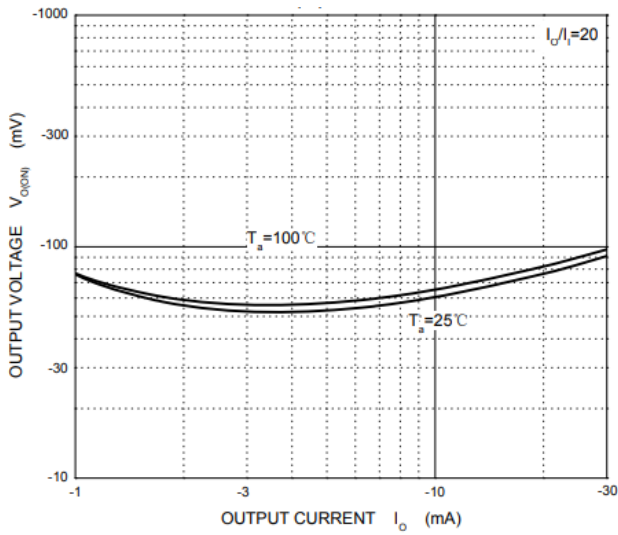


Fig 4: DC Current Gain Characteristics


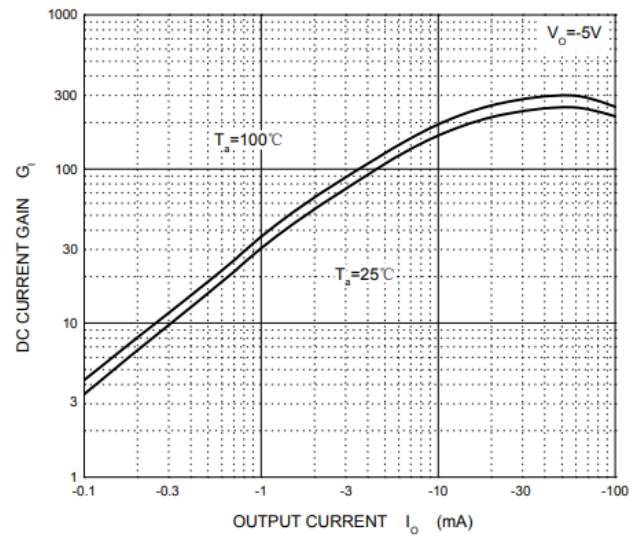


Fig 5: P_D - T_a Curve

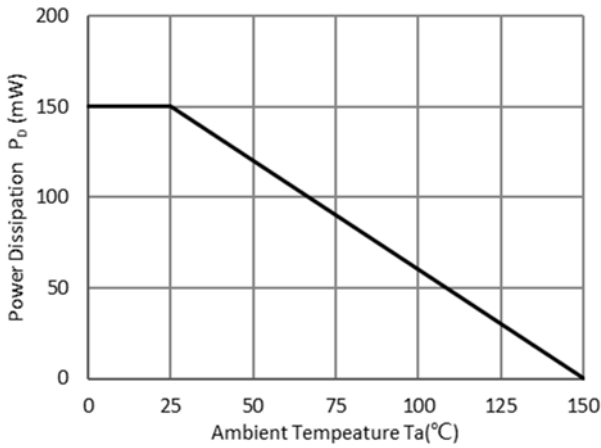


Ordering Information


Preferred P/N	Packing code	Unit weight(g)	Minimum package(pcs)	Inner box quantity(pcs)	Outer carton quantity(pcs)	Delivery mode
EMD2	F2	Approximate 0.0035	3000	30000	120000	7" reel

Outline Dimensions


SOT-563

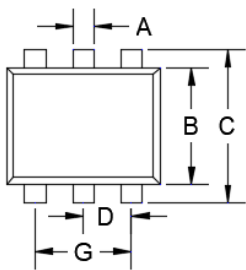

TOP VIEW




SIDE VIEW



SIDE VIEW

DIM	DIMENSIONS			
	INCHES		MM	
	MIN	MAX	MIN	MAX
A	0.006	0.011	0.150	0.300
B	0.043	0.051	1.100	1.300
C	0.059	0.067	1.500	1.700
D	0.016	0.024	0.400	0.600
G	0.035	0.043	0.900	1.100
H	0.059	0.067	1.500	1.700
K	0.021	0.026	0.550	0.650
L	0.004	0.011	0.100	0.300
M	0.004	0.007	0.100	0.180

Suggested Pad Layout

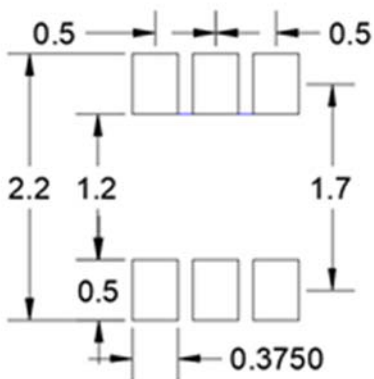

UNIT:mm



Disclaimer

The information presented in this document is for reference only. Yangzhou Yangjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function, or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Yangjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website [http:// www.21yangjie.com](http://www.21yangjie.com) , or consult your nearest Yangjie's sales office for further assistance.